


# INSTRUCTIONS FOR Refrigerator Box Assembly

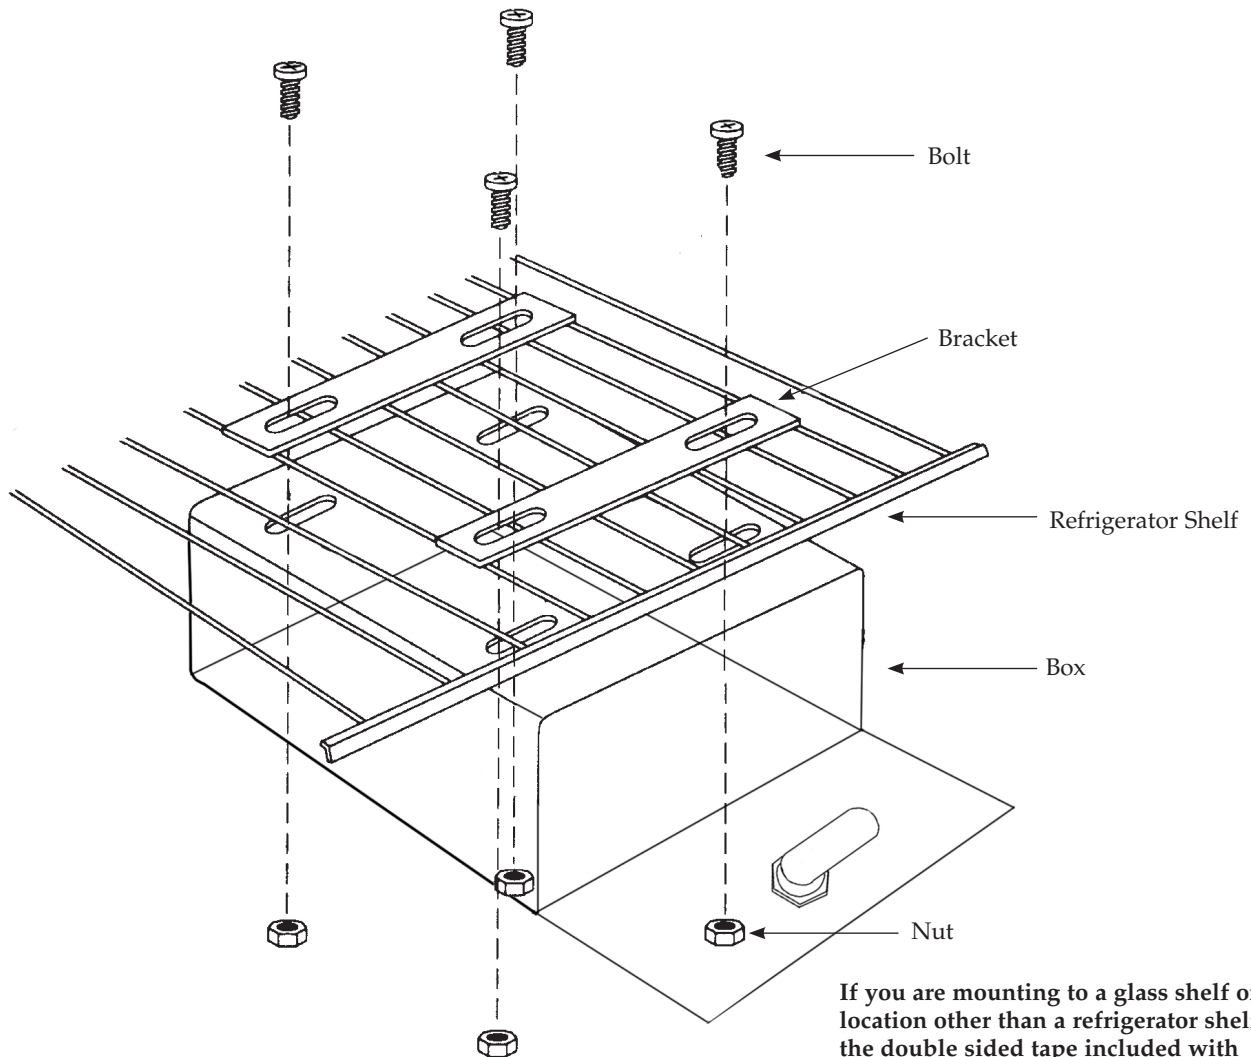

This box was designed to be attached to wire grid type refrigerator shelves.  
If possible remove the refrigerator shelf unit on which the box is to be installed.  
Tools required: a  $\frac{7}{16}$ " wrench or a socket and a Phillips screwdriver.

1. Using the enclosed sketch as reference, hold the open box under a shelf as close to the front edge of the shelf as possible without interfering with the box lock.
2. Lay one of the two brackets across the top of the shelf so that the bracket holes line up with those in the top of the box and then drop two of the enclosed bolts through each pair of holes and tighten nuts with fingers on each of these bolts from the inside of the box. Repeat this process with the second bracket.
3. Put the wrench or socket on each nut from the inside of the box and tighten with the screwdriver from the top. Do not completely tighten the bolts/nuts until you have determined the final position. Note: these are locking nuts that required a fair amount of effort to install and can not be loosened once installed.

If you have any questions about the installation and/or use of this locking tray, please contact our Customer Service Team.

**Call Free 1.800.848.1633 • Fax Free 1.800.447.2923**  
Web: GoHCL.com • Email: hcl@GoHCL.com